

FORCE intec 5250

Intec Part #'s:
 FORCE 5250 – wired remote
 FORCE 5250 GW – GOWIRELESS remote
 Truck Mount Insulation Blowing Machine

❖ Engineered for High Productivity ❖ Built-to-Last for High Value Generation



High return on investment –
 High Build Quality provides Reliable & Dependable operation...so you can focus on making \$\$\$.

Application Versatility –
 Attics, BIBs, Dense Pack, Spray-on; Cellulose, Fiberglass, and Stone Wool.

Consistent Performance
 With Intec Quick-Access™ features, machine adjustments & maintenance are simplified to effortlessly keep your system operating at High Output levels

Value Engineered with:

- ✓ Easy access slide-out airlock enables quick seal change.
- ✓ Intec's proprietary urethane casted seals last 2-3X longer than industry standard seals.
- ✓ Oversized positive displacement blower w/ splash lubrication provides quiet operation, low maintenance, with high airflow & associated production.
- ✓ Back-flow valve standard - provides for long lasting system by preventing material from backing up into blower.
- ✓ Pressure relief valve standard – ensures system does not create more pressure than desired to protect components.
- ✓ Air 'dump' valve standard – provides beneficial adjustments for sensitive wall assemblies.
- ✓ Fresh Air Inlets standard – provide clean air to Vanguard and Blower motor enabling long life.
- ✓ Narrow width and low height enables operation from many vehicles in a variety of locations.
- ✓ Dual pulley's and belts with automatic tensioners drastically reduce maintenance.

FORCE® - The Truck Mount Blowing Machine Brand that will change the industry standard

integrity

excellence

innovation

trust

800-666-1611

Click pictures for website link

www.inteccorp.com

Rev: 20200703

Intec's Professional Grade Equipment

Engineered for High Productivity

Built-to-Last for High Value Generation




FORCE®

Insulation Blowing Machines



Specifications

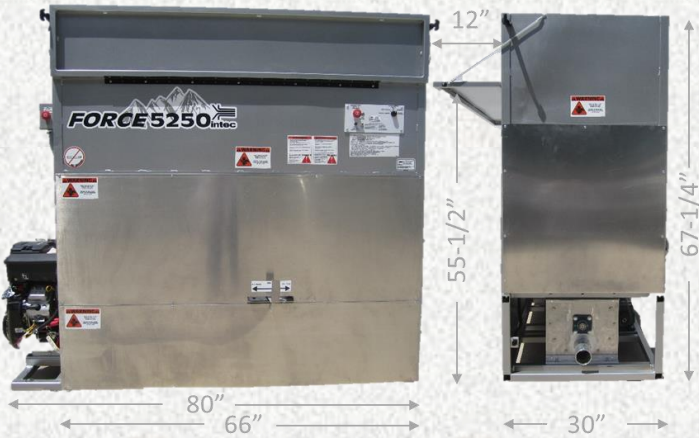

- Weight: 1,015 lbs (461 kg)
- Hopper: 45 cubic feet
- Hose outlet: 3 inches (10.2cm)
- Motor: electric start Vanguard V-Twin 18hp motor
- High volume positive displacement blower
- 40 chain with built-in tensioners & dual pulley's & belts for long lasting durability
- Fresh air intake for blower & Vanguard motor
- 6.95 quart gas tank
- Wired remote with 150' cord & Intec's exclusive urethane jacketed controls for long-life
- GOWIRELESS – optional Long Range Transmission wireless controls
- Warranty: 1 year limited

note: Intec tests following ASTM procedures. Hose length, diameter, product brand, humidity, and lift height will impact actual production.

Product	Production (lbs per min)
Cellulose	35 – 40+
Fiberglass	16 - 19

Machine Features

Shredding Chamber & Airlock


- ✓ Easy Access Gate with pin setting for quick material flow adjustments
- ✓ Easy Access Airlock with slide out feature – remove one chain and a few bolts for quick release
- ✓ Cast urethane seals for long-life



- Large 45 cu ft Hopper w/ generous loading platform
- ✓ 4-6 bags cellulose
- ✓ 2-3 bags fiberglass



- ✓ Precision Feed Agitation

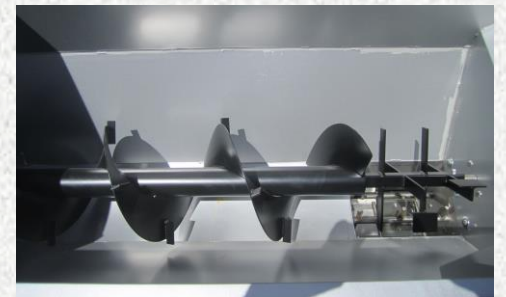


- ✓ 18h Commercial Vanguard V-Twin

Value Engineered Design for years of trouble-free operation:



- ✓ Backflow preventor
- ✓ Pressure relieve valve

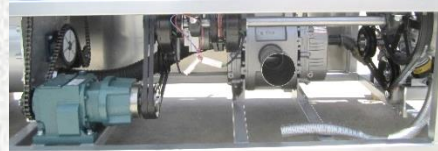

- ✓ Gear box
- ✓ Dual pulleys & belts
- ✓ Automatic chain tensioners

Additional Intec Systems & Accessories

Heavy Duty Capabilities



Dense Pack



Blow Behind Netting



Spray On



Attics

Intec's Popular Combatt Nozzles



Part#: K3000 2" inlet Part#: K3001 2-1/2" inlet Part#: K3002 3" inlet



Hose Packages

OptiSpray Nozzles



Part#: K3200 2" inlet

Part#: K3206-01 2-1/2" inlet

Fluid Delivery Systems



compact pumps

Spray Tips & Filters




Recycle Hood



15"

Distributed by

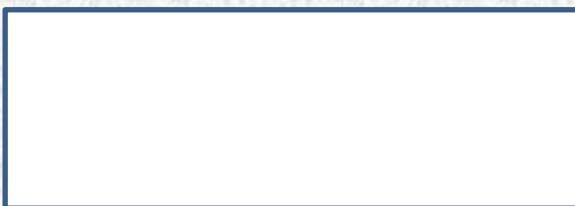

Manufactured by

Insulation Technology Corporation, d.b.a. Intec
4040 Kodiak Court
Frederick, CO 80504
1-800-666-1611
www.inteccorp.com

Click pictures for website link



Local: 303-833-6644
Fax: 303-833-6650
sales@inteccorp.com

... it's the 'tec' inside that counts!