

## Insulation Blowing Machine

### Complete Portability

The FiberForce's two piece design, light weight, and built in handles and wheels provide the ability to transport in almost any vehicle and access any jobsite. The removable hopper has a hinged shelf to simplify product loading while minimizing aisle and transportation space requirements.

### High Production Rates

One hour install of R-19 cellulose or fiberglass in a 1500 square foot attic is made possible by its high production rates.

### Ease of Use

The wireless remote enables operation from the installation location without the requirement of taking a cord with you.



System shown with **standard wireless remote, power cord, & 100 feet of hose.**

***The finest Do-It-Yourself portable insulation machine on the market!***

- ✓ **Polyethylene construction: lightweight, rust-free, and extremely durable.**
- ✓ **1-15amp 115V circuit simplifies power requirement.**
- ✓ **Quick-connect hose connectors.**
- ✓ **Slide gate enables blow behind netting & dense pack in addition to attics.**
- ✓ **Intec's urethane seals last 2-3X longer than industry standard seals providing high production rates with less required maintenance.**
- ✓ **Stainless steel airlock plates create a virtually indestructible airlock.**
- ✓ **Hopper options to increase system capacity as beneficial with desired use.**

*integrity*

*excellence*

*innovation*

*trust*

800-666-1611

www.inteccorp.com

Rev: 20180104

**VORTEC**® Intec's Professional Grade Equipment  
 Engineered for High Productivity Built-to-Last For High Value Generation  
 High Powered Vacuums

**FORCE**®

Insulation Blowing Machines



**Specifications**



- Weight: 163lbs (74.1kg) standard hopper  
174lbs (79.1kg) optional tall hopper
- Hose outlet: 2-1/2 inches (6.4cm)
- Electrical: 115VAC @14amps
- Power Cord: 1 - 12/3 gauge twist lock 50' (15.2m) with LED indicators indicating power transmission
- 1 year warranty, limited.

**High Production Rates:**

- 42 bags/hr cellulose; 1050 lbs/hr (477kg/hr)
- 13 bags/hr fiberglass; 400 lbs/hr (182kg/hr)

**Hopper Options**

Standard	Tall
✓ Smaller footprint	✓ Increased hopper capacity
✓ Enhanced portability	✓ Larger working platform

**Machine Features**



Two piece polyethylene construction enhances portability



Quick-Connect hose



Quick-clean filter & access panels simplify maintenance



Fold-down shelf provides generous loading platform




Industrial grade wireless remote compliments ease of operation



Slide Gate adds to application versatility

**Backed by Intec's industry leading Technical Service.  
Training & Accessories are available to increase your efficiencies.**

Distributed by

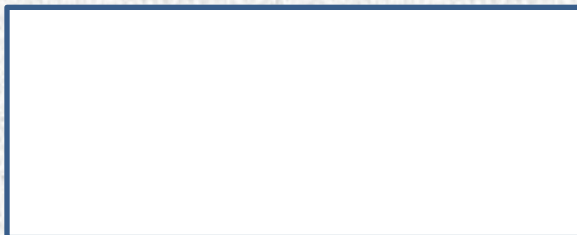

**Manufactured by**

Insulation Technology Corporation, d.b.a. Intec  
4040 Kodiak Court  
Frederick, CO 80504

Click pictures for website link



1-800-666-1611  
www.inteccorp.com

Local: 303-833-6644  
Fax: 303-833-6650  
sales@inteccorp.com



... it's the 'tec' inside that counts!