

Professional Grade Generator

# GENERATOR

Intec Part #: 4000-10000 Generator 10kW  
4000-10000 WHEELS Wheel Kit – 2 wheels  
4000-12000 BATTERY Battery Generator

**Professional Grade – 10,000 Watts ~ Meets Contractors' Demands**



Powered by Vanguard 570cc V-Twin for smooth operation  
Automatic voltage regulation for sensitive electronics



### LED Display

Hours, RPMs, voltage, and frequency readings automatically cycle on the display.



### Load Bars

Easily verify the load balance on each leg of the generator end.

### Warnings

The LED will flash if any parameter gets outside of normal range. A warning will also be displayed when it is time for an oil change.

### Receptacle Panel with GFCI protection

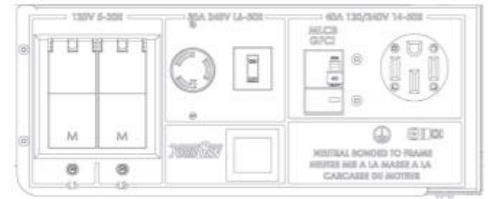

integrity

excellence

innovation

trust

800-666-1611

[www.inteccorp.com](http://www.inteccorp.com)

Click pictures for website link

Rev: 20211229

## Intec's Professional Grade Equipment



Engineered for High Productivity

Built-to-Last for High Value Generation



Insulation Blowing Machines



## Specifications

ENGINE	
ENGINE BRAND	BRIGGS & STRATTON
ENGINE MODEL	VANGUARD
ENGINE STARTER	ELECTRIC /RECOIL
ENGINE SPEED	3600 RPM
ENGINE CYLINDERS	V-TWIN
DISPLACEMENT/TYPE	570 CC / OHV
FREQUENCY REGULATION <sup>(1)</sup>	+/- 3%
LOW OIL PROTECTION	STANDARD
RECOMMENDED OIL <sup>(2)</sup>	5W-30
OIL CAPACITY	2.4 QT
FUEL TANK	7 GAL
FUEL GAUGE	YES
FULL LOAD RUN TIME <sup>(3)</sup>	4.3 HOURS
FUEL CONSUMPTION	GAL/HR
100%	1.64
75%	1.34
50%	1.01
25%	0.77

DERATES	
1,000FT ABOVE SEA LEVEL	3.5%
ABOVE 77°F	1% FOR EACH 10°F

ELECTRICAL	
STARTING WATTS	10,000
RUNNING WATTS	9,600
RUNNING AMPS @ 120 VAC	80
RUNNING AMPS @ 240 VAC	40
VOLTAGE REGULATION	AVR +/- 1%
MAIN CIRCUIT BREAKER	40 AMP, 240V (GFCI)
BRUSH	YES
BONDED NEUTRAL	YES
120 VOLT RECEPTACLES	(2) NEMA 5-20 20A DUPLEX (GFCI)
120/240 VOLT RECEPTACLES	(1) NEMA 14-50 50A (GFCI)
240 VOLT RECEPTACLES	(1) NEMA L6-30 30A (GFCI)
YOURGEN METER	STANDARD

GENSET	
MOTOR STARTING (CODE G)	3 HP
DBA @ 7 METERS	
NO LOAD	81.3
FULL LOAD	82.8
TOTAL HARMONIC DISTORTION	< 6%
LIFTING EYE <sup>(1)</sup>	STANDARD
2-WHEEL DOLLY KIT	OPTIONAL
INSULATION	CLASS H
PROTECTIVE ROLL FRAME	1.25" DIA. 14 GA. STEEL
ASSEMBLED IN	USA
EPA APPROVED	YES
CARB APPROVED	YES

Specifications subject to change; contact Intec for current specifications

## Features

# GENERATOR

### Briggs & Stratton Vanguard Engine

- ✓ Premium-grade Vanguard engines are application-engineered to power equipment that works for a living.

### YourGen Meter

- ✓ LED meter displaying hours, RPMs, voltage, and frequency readings. Verifies the load balance with a load bar display. Warnings when a parameter is outside of normal range and when an oil change is needed.

### Low Oil Protection

- ✓ In the event of low-oil level, the engine will shut down, which will protect the engine from damage.

### Powder Coat Paint

- ✓ Incredibly strong finish.

### Sturdy Wrap Around Cradle

- ✓ 14 Gauge, welded, tubular steel provides industrial strength support.

### Automatic Voltage Regulation

- ✓ This generator will automatically regulate voltage at +/- 1% and is safe for sensitive electrical equipment.

### Premium Circuit Breakers

- ✓ Provides a clear and instant indication of a tripped circuit.

## Accessories



Wheel Kit

Part #: 4000-10000 WHEELS



Slide Out – options available

Part #: 77045-00 or 77046-00



Battery

Part #: 4000-12000 BATTERY

Distributed by



Manufactured by

Insulation Technology Corporation, d.b.a. Intec  
9251 Bruin Boulevard  
Frederick, CO 80504

1-800-666-1611  
www.inteccorp.com

Local: 303-833-6644  
Fax: 303-833-6650  
sales@inteccorp.com

Click pictures  
for website link



... it's the 'tec' inside that counts!

