



Standard Configuration: part#: K81018

Extended Hopper Configuration: part#: K81018 -18

Insulation Blowing Machine

When looking for a capable, versatile, Do-It-Yourself unit with a record of rigorous use, look no further than Intec's Cyclone

Exceptional Performance

Intec's highly portable and easy to use Cyclone insulation blowing machine simplifies Do-It-Yourselfers insulation activities. This simple to use system provides ease of transportation to the job site and timely installation of attic insulation – approximately ¾ hour to install R-19 cellulose and 1 hour to install R-19 fiberglass in a 1000 square foot attic.

Ease of Use

The system's control panel and wired remote provide for ease of operation from either the unit or the attic. Ease of transfer between retail location and jobsite is enabled by its small size & built-in wheels. Hose, connectors and clamps come standard -- everything you need to begin using immediately.

Versatile Capabilities

The Cyclone comes equipped with a slide gate to control material flow -- providing its users sidewall retrofit capabilities in addition to attic installations. Be it cellulose drill & fill, or fiberglass dense pack, this system can do-it-all.



See it in Action



Total Reliability

The powder coated exterior endures the most demanding use, while the automatic chain tensioner provides for high uptime capability. Minimal maintenance, combined by support from Intec's technical service team, provides for a system experience offering some of the highest industry uptimes and lowest life-cycle costs.

integrity

excellence

innovation

trust



FORCE[®]

Insulation Blowing Machines




303-833-6644

Rev: 20241103

www.inteccorp.com

Specifications

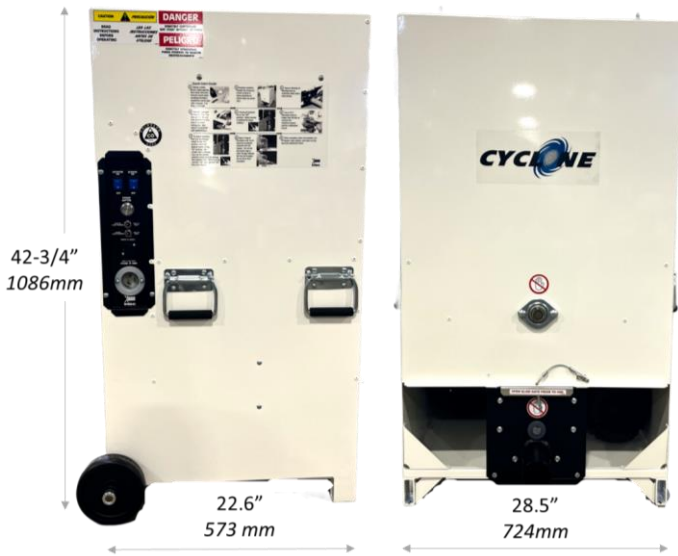

- Weight: 176lbs (79.8kg)
- Hose outlet: 2-1/2 inches (6.4cm)
- Power Requirements: 115VAC, 60Hz, 15 amp
- Power Cord: 1 - 12/3 gauge twist lock 50' long
- Remote Cord: 100' Remote Cord with Impact Resistance Controls
- Warranty: 1 year limited.

Production Rates:

- | | |
|-------------------------|-------------------------|
| Cellulose: | Fiberglass: |
| • 39 bags/hr | • 8-1/2 bags/hr |
| • 970 lbs/hr (441kg/hr) | • 255 lbs/hr (116kg/hr) |

Specifications subject to change; contact Intec for current specifications

Accessories

Hopper Extension Configuration



Pressure Gauge



Machine Features


- ✓ Control panel and wired remote provide ease of operation from either unit or location of install.




- ✓ Slide gate adds to application versatility



- ✓ Access panel simplifies maintenance




- ✓ Quick-Start Guide simplifies user's experience

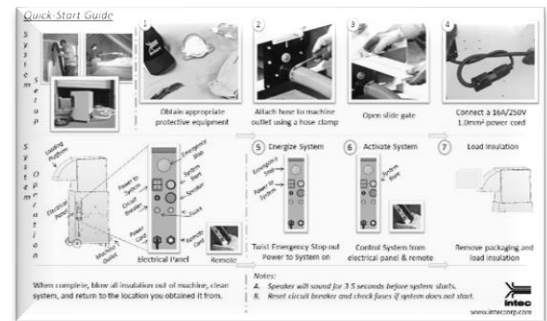

Backed by Intec's industry leading Technical Service Training & Accessories are available to increase your efficiencies

Distributed by



Manufactured by

Insulation Technology Corporation, d.b.a. Intec
9251 Bruin Boulevard
Frederick, CO 80504



Phone: 303-833-6644
sales@inteccorp.com

www.inteccorp.com



... it's the 'tec' inside that counts!