

GENERATOR

Intec Part #: 4000-10000 Generator 10kW
 4000-10000 WHEELS Wheel Kit – 2 wheels
 4000-12000 BATTERY Battery Generator

Professional Grade – 10,000 Watts ~ Meets Contractors' Demands



LED Display

Hours, RPMs, voltage, and frequency readings automatically cycle on the display.

Load Bars



Easily verify the load balance on each leg of the generator end.

Warnings

The LED will flash if any parameter gets outside of normal range. A warning will also be displayed when it is time for an oil change.

Powered by Vanguard 570cc V-Twin for smooth operation
 Automatic voltage regulation for sensitive electronics

Receptacle Panel with GFCI protection

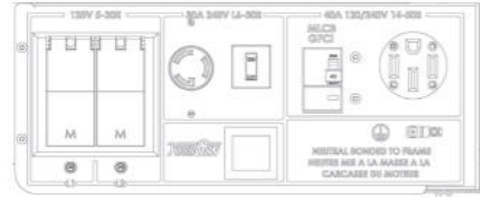

integrity

excellence

innovation

trust

800-666-1611

www.inteccorp.com

Rev: 20240620



FORCE[®]

Insulation Blowing Machines



MEGA Beast Cyclone Cannon Fiber Force FORCE/2 HP FORCE/3 HP2 TURBO FORCE FORCE 5250 FORCE 5650 FORCE 5850

Specifications

ENGINE

| | |
|-------------------------------------|-------------------|
| ENGINE BRAND | BRIGGS & STRATTON |
| ENGINE MODEL | VANGUARD |
| ENGINE STARTER | ELECTRIC / RECOIL |
| ENGINE SPEED | 3600 RPM |
| ENGINE CYLINDERS | V-TWIN |
| DISPLACEMENT/TYPE | 570 CC / OHV |
| FREQUENCY REGULATION ⁽¹⁾ | +/- 3% |
| LOW OIL PROTECTION | STANDARD |
| RECOMMENDED OIL ⁽²⁾ | 5W-30 |
| OIL CAPACITY | 2.4 QT |
| FUEL TANK | 7 GAL |
| FUEL GAUGE | YES |
| FULL LOAD RUN TIME ⁽³⁾ | 4.3 HOURS |
| FUEL CONSUMPTION | GAL/HR |
| 100% | 1.64 |
| 75% | 1.34 |
| 50% | 1.01 |
| 25% | 0.77 |

DERATES

| | |
|-------------------------|------------------|
| 1,000FT ABOVE SEA LEVEL | 3.5% |
| ABOVE 77°F | 1% FOR EACH 10°F |

ELECTRICAL

| | |
|--------------------------|---------------------------------|
| STARTING WATTS | 10,000 |
| RUNNING WATTS | 9,600 |
| RUNNING AMPS @ 120 VAC | 80 |
| RUNNING AMPS @ 240 VAC | 40 |
| VOLTAGE REGULATION | AVR +/- 1% |
| MAIN CIRCUIT BREAKER | 40 AMP, 240V (GFCI) |
| BRUSH | YES |
| BONDED NEUTRAL | YES |
| 120 VOLT RECEPTACLES | (2) NEMA 5-20 20A DUPLEX (GFCI) |
| 120/240 VOLT RECEPTACLES | (1) NEMA 14-50 50A (GFCI) |
| 240 VOLT RECEPTACLES | (1) NEMA L6-30 30A (GFCI) |
| YOURGEN METER | STANDARD |

GENSET

| | |
|----------------------------|-------------------------|
| MOTOR STARTING (CODE G) | 3 HP |
| DBA @ 7 METERS | |
| NO LOAD | 81.3 |
| FULL LOAD | 82.8 |
| TOTAL HARMONIC DISTORTION | < 6% |
| LIFTING EYE ⁽¹⁾ | STANDARD |
| 2-WHEEL DOLLY KIT | OPTIONAL |
| INSULATION | CLASS H |
| PROTECTIVE ROLL FRAME | 1.25" DIA. 14 GA. STEEL |
| ASSEMBLED IN | USA |
| EPA APPROVED | YES |
| CARB APPROVED | YES |

Specifications subject to change; contact Intec for current specifications

Features

GENERATOR

Briggs & Stratton Vanguard Engine

- ✓ Premium-grade Vanguard engines are application-engineered to power equipment that works for a living.

YourGen Meter

- ✓ LED meter displaying hours, RPMs, voltage, and frequency readings. Verifies the load balance with a load bar display. Warnings when a parameter is outside of normal range and when an oil change is needed.

Low Oil Protection

- ✓ In the event of low-oil level, the engine will shut down, which will protect the engine from damage.

Powder Coat Paint

- ✓ Incredibly strong finish.

Sturdy Wrap Around Cradle

- ✓ 14 Gauge, welded, tubular steel provides industrial strength support.

Automatic Voltage Regulation

- ✓ This generator will automatically regulate voltage at +/- 1% and is safe for sensitive electrical equipment.

Premium Circuit Breakers

- ✓ Provides a clear and instant indication of a tripped circuit.

Accessories



Wheel Kit

Part #: 4000-10000 WHEELS



Slide Out – options available


Part #: 77045-00 or 77046-00



Battery

Part #: 4000-12000 BATTERY

Distributed by



Manufactured by

Insulation Technology Corporation, d.b.a. Intec
9251 Bruin Boulevard
Frederick, CO 80504



phone: 303-833-6644
sales@intecorp.com

www.intecorp.com

... it's the 'tec' inside that counts!

